

INSTALLATION


OPTIONS

SeceuroGlide Excel must always be installed by a trained installer and in accordance with the specified fitting criteria (as stated in the installation instructions).

In order to meet LPS 2081 certification requirements, the door must be face fitted internally with 90mm guide rails. Both the guide channels and box assembly must be fully hidden behind the structure. The product should only be installed to brick, block work, structural steel or structural timber.


FACE FIX - INTERNAL

- Installed inside the opening.
- The inside edge of the guide rails line up with the brick opening.
- Ideal where headroom inside the garage isn't seriously restricted.
- Internal reveal fixing may be used to great effect in arched openings.

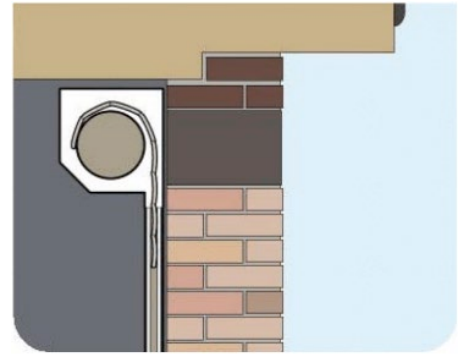


FACE FIX - EXTERNAL

- Installed outside the opening.
- Ideal where headroom is particularly restricted.
- Requires full box option for weatherproofing.

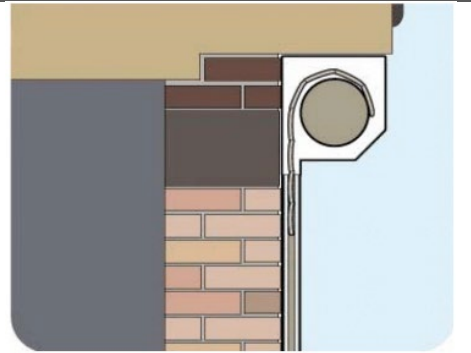

REVEAL FIX

- Installed within the opening itself.
- Maximises internal space in the garage whilst not obscuring the exterior of the garage.
- Requires good reveal headroom.
- Reduces with drive through width of the door by the width of the guide rails.

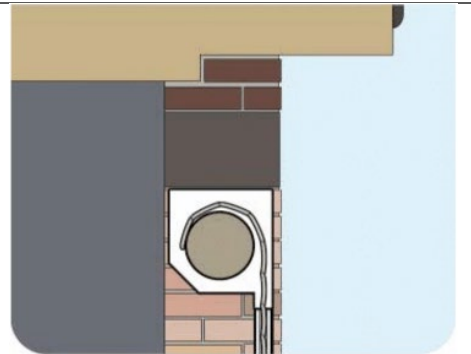

All SeceuroGlide Original doors come with an Operating & Maintenance manual and handover video for the end user.

Manufactured by SWS UK, Claughton, Lancs, LA2 9LA.



A C C E S S
& SECURITY SYSTEMS LTD

Incorporating Abbey Garage Doors

TEL: 01189 817 300

info@rollergaragedoorscentre.co.uk

www.rollergaragedoorscentre.co.uk

Showroom: Unit 7 Bacchus House, Calleva
Park, Aldermaston, RG7 8EN